



1995

DESIGNED FOR PARTS JOBBERS, AUTO ELECTRICS, VOCATIONAL SCHOOLS, ETC. PROVIDES QUICK BEFORE SHIPMENT TESTS TO MINIMIZE COMPLAINTS AND WARRANTY RETURNS OF ALL PASSENGER TYPE ALTERNATORS.

**ALTERNATOR
STARTER TESTER
1/3 HP**

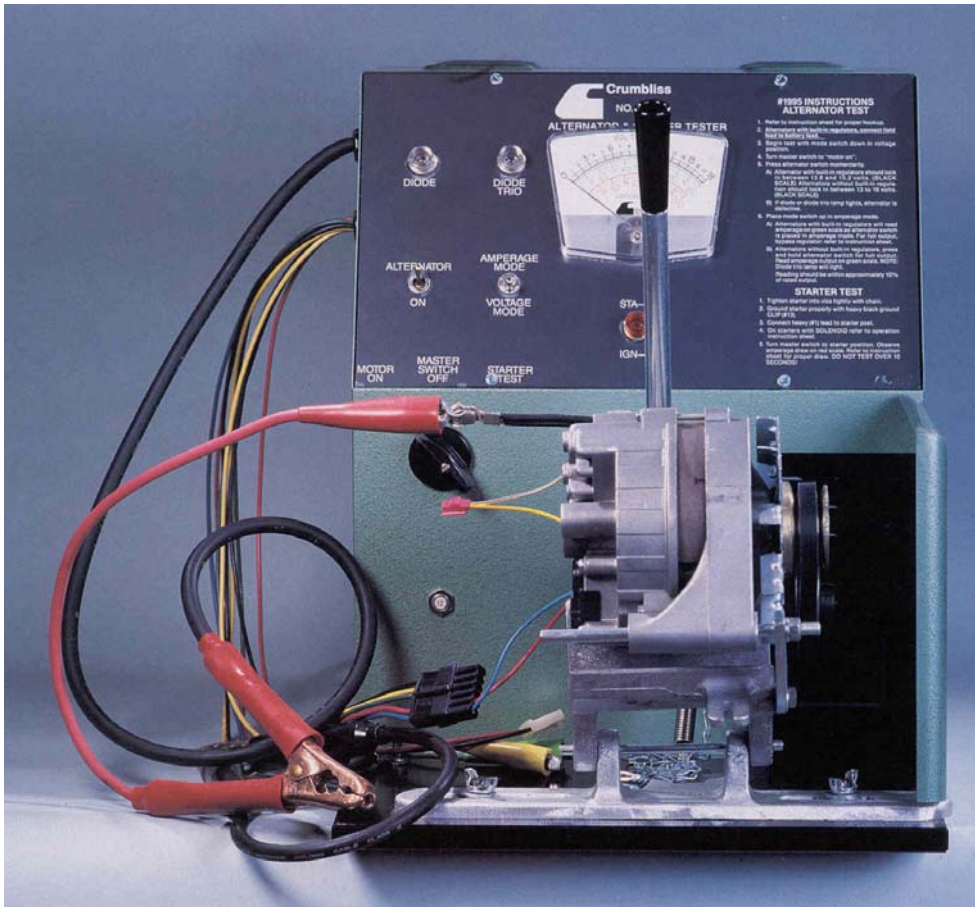

FULL OUTPUT TESTING. ALL ELECTRIC.



5812 Enterprise Parkway • Fort Myers, Florida 33905
(941) 693-8588 • Fax (941) 693-8264
E-Mail: crumblissr@aol.com
Web Site: www.crumbliss.com

Features

**MORE THAN A FIXED LOAD TESTER
INDICATES ALTERNATORS FULL OUTPUT
NO BATTERIES REQUIRED
STARTER FREE RUN TEST
VOLTMETER SHOWS ALTERNATOR OUTPUT VOLTAGE/INTEGRAL VOLTAGE REGULATOR
CONTROLLING VOLTAGE**

- Turn on motor, momentarily press test switch, voltmeter will lock in.
- Flip mode switch to amperage test, ammeter will indicate amperage output.
- Indicator lights show alternators ripple, diodes, lode trio, stator terminal/IGN 'R' conditions.
- No unnecessary switches to confuse the operator.
- Adjustable aluminum quick mounting vise.
- Belt guard.
- Alternator harness for easy hook up of foreign and domestic alternator test leads.
- Modular design for easy servicing.
- Three range color coded pivot and jewel analog meter.
- Alternator output on green scale.
- Regulated voltage on black scale.
- Free run starter draw on red scale.
- Built-in voltage regulator In voltage test to lock in external regulated alternators.
- Color coded wires simplify hookup.
- Heavy duty master switch controls alternator and starter functions of tester.
- Heavy duty self-contained power supply.
- Heavy duty lodes.
- Built-in overload protection.
- Heavy duty #04 cables and clamps.
- Delco CS 12111301744 voltage test only.

1836-R Specifications:

110 volt single phase
Shipping weight: 83 lbs.
Measures: 15" x 22 1/2" x 18 1/2"

Optional Equipment for 1836-R

- Foreign and domestic alternator test leads.